R32
MULTI SPLIT

R32 MULTI SPLIT

OUTDOOR UNITS

MU2R15
MU2R17

(Unit : mm)







LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
: www.eurovent-certification.com

OUTDOOR UNIT				MU2R15 UL0	MU2R17 UL0
Compressor	Type			Twin Rotary	Twin Rotary
Capacity *	Cooling	Min / Nom / Max	kW	0.9 / 4.1 / 4.7	0.9 / 4.7 / 5.4
	Heating	Min / Nom / Max	kW	1.0 / 4.7 / 5.4	1.0 / 5.3 / 5.7
Low Temperature Capacity	Heating -7°C	Max	kW	3.3	3.7
Power Input *	Cooling	Min / Nom / Max	kW	0.2 / 1.0 / 1.4	0.2 / 1.3 / 1.7
	Heating	Min / Nom / Max	kW	0.2 / 1.1 / 1.4	0.2 / 1.3 / 1.6
Running Current	Cooling	Min / Nom / Max	A	1.1 / 4.6 / 6.4	1.1 / 5.6 / 7.9
	Heating	Min / Nom / Max	A	1.1 / 4.9 / 6.6	1.1 / 5.5 / 7.6
EER				4.14	3.75
COP				4.38	4.22
SEER				8.50	7.80
SCOP				4.20	4.20
Pdesign (@-10°C)			kW	4.10	4.10
Seasonal Energy Label	Cooling / Heating			A+++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating			169 / 1,367	210 / 1,367
Airflow Rate	Nom		m^3/min	28.2	28.2
Sound Pressure	Cooling	Nom	dBA	48	48
	Heating	Nom	dBA	51	51
Sound Power	Cooling	Max	dBA	61	63
Dimensions	W x H x D		mm	770 x 545 x 288	770 x 545 x 288
Net Weight			Kg	36	36
Refrigerant	Type			R32	R32
	Charge		Kg	1.1	1.1
	Additional Charge		g/m	20	20
	GWP			675	675
	t-CO_2 eq			0.74	0.74
Operation Range (Outdoor)	Cooling	Min ~ Max	°C DB	-10 ~ 48	-10 ~ 48
	Heating	Min ~ Max	°C WB	-18 ~ 18	-18 ~ 18
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable			No. x mm^2	3C x 2.5	3C x 2.5
Transmission Cable			No. x mm^2	4C x 0.75	4C x 0.75
Circuit Breaker			A	15	15
Piping Length Total			m	30	30
Piping Length per Branch		Max	m	20	20
Piping Elevation Difference	IDU - ODU	Max	m	15	15
	IDU - IDU	Max	m	7.5	7.5
Piping Connection	Liquid		mm (inch) x No.	Ø6.35 (1/4) x 2	Ø6.35 (1/4) x 2
	Gas		mm (inch) x No.	Ø9.52 (3/8) x 2	Ø9.52 (3/8) x 2

Notes : 1. Capacities are based on the following conditions:
Heating: - Indoor Temperature 20°C(68°F) DB/15°C(59°F) WB
- Outdoor Temperature 7°C(44.6°F) DB/6°C(42.8°F) WB
Piping Length: - Interconnecting Piping Length 7.5m
- Level Difference of Zero
2. * : See page "Combination Table".
3. Due to our policy of innovation some specifications may be changed without notification.
4. At least two indoor units should be connected
5. Minimum comnination capacity rate should be more than 40%
6. This product contains fluorinated greenhouse gases (R32)

R32 MULTI SPLIT

OUTDOOR UNITS

MU3R19
MU3R21

(Unit : mm)

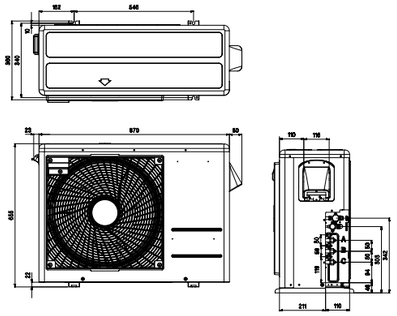

LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
: www.eurovent-certification.com

OUTDOOR UNIT				MU3R19 UE0	MU3R21 UE0
Compressor	Type			Twin Rotary	Twin Rotary
Capacity *	Cooling	Min / Nom / Max	kW	1.1 / 5.3 / 6.3	1.1 / 6.2 / 7.3
	Heating	Min / Nom / Max	kW	1.2 / 6.3 / 7.3	1.2 / 7.0 / 7.8
Low Temperature Capacity	Heating -7°C	Max	kW	4.4	4.9
Power Input *	Cooling	Min / Nom / Max	kW	0.2 / 1.2 / 1.8	0.2 / 1.4 / 2.1
	Heating	Min / Nom / Max	kW	0.3 / 1.4 / 2.0	0.3 / 1.6 / 2.3
Running Current	Cooling	Min / Nom / Max	A	1.1 / 5.3 / 8.1	1.1 / 6.7 / 9.6
	Heating	Min / Nom / Max	A	1.1 / 6.3 / 9.4	1.1 / 7.4 / 10.6
EER				4.59	4.27
COP				4.62	4.42
SEER				8.50	8.50
SCOP				4.21	4.21
Pdesign (@-10°C)			kW	4.90	4.90
Seasonal Energy Label	Cooling / Heating			A+++ / A+	A+++ / A+
Annual Energy Consumption	Cooling / Heating			217 / 1,629	253 / 1,629
Airflow Rate	Nom		m^3/min	50	50
Sound Pressure	Cooling	Nom	dBA	49	50
	Heating	Nom	dBA	54	54
Sound Power	Cooling	Max	dBA	63	64
Dimensions	W x H x D		mm	870 x 655 x 320	870 x 655 x 320
Net Weight			Kg	44	44
Refrigerant	Type			R32	R32
	Charge		Kg	1.4	1.4
	Additional Charge		g/m	20	20
	GWP			675	675
	t-CO_2 eq			0.95	0.95
Operation Range (Outdoor)	Cooling	Min ~ Max	°C DB	-10 ~ 48	-10 ~ 48
	Heating	Min ~ Max	°C WB	-18 ~ 18	-18 ~ 18
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable			No. x mm^2	3C x 2.5	3C x 2.5
Transmission Cable			No. x mm^2	4C x 0.75	4C x 0.75
Circuit Breaker			A	20	20
Piping Length Total			m	50	50
Piping Length per Branch		Max	m	25	25
Piping Elevation Difference	IDU - ODU	Max	m	15	15
	IDU - IDU	Max	m	7.5	7.5
Piping Connection	Liquid		mm (inch) x No.	Ø6.35 (1/4) x 3	Ø6.35 (1/4) x 3
	Gas		mm (inch) x No.	Ø9.52 (3/8) x 3	Ø9.52 (3/8) x 3

Notes :1. Capacities are based on the following conditions:
Heating: - Indoor Temperature 20°C(68°F) DB/15°C(59°F) WB
- Outdoor Temperature 7°C(44.6°F) DB/6°C(42.8°F) WB
Piping Length: - Interconnecting Piping Length 7.5m
- Level Difference of Zero
2. * : See page "Combination Table".
3. Due to our policy of innovation some specifications may be changed without notification.
4. At least two indoor units should be connected
5. Minimum comnination capacity rate should be more than 40%
6. This product contains fluorinated greenhouse gases (R32)

MU4R25
MU4R27
MU5R30

(Unit : mm)

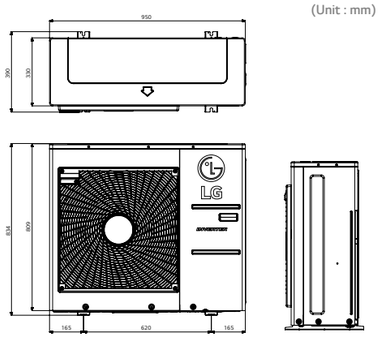

LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification
: www.eurovent-certification.com

OUTDOOR UNIT				MU4R25 U40	MU4R27 U40	MU5R30 U40
Compressor	Type			Twin Rotary	Twin Rotary	Twin Rotary
Capacity *	Cooling	Min / Nom / Max	kW	1.3 / 7.0 / 8.5	1.3 / 7.9 / 9.5	1.3 / 8.8 / 10.6
	Heating	Min / Nom / Max	kW	1.5 / 8.4 / 9.4	1.5 / 9.1 / 10.6	1.5 / 10.1 / 12.1
Low Temperature Capacity	Heating -7°C	Max	kW	5.9	6.4	7.1
Power Input *	Cooling	Min / Nom / Max	kW	0.4 / 1.5 / 2.6	0.4 / 1.8 / 2.9	0.4 / 2.0 / 3.4
	Heating	Min / Nom / Max	kW	0.6 / 1.8 / 2.9	0.6 / 2.1 / 3.4	0.6 / 2.2 / 3.6
Running Current	Cooling	Min / Nom / Max	A	1.9 / 6.6 / 11.9	1.9 / 8.1 / 13.1	1.9 / 9.1 / 15.2
	Heating	Min / Nom / Max	A	2.8 / 8.3 / 13.1	2.8 / 9.4 / 15.3	2.8 / 9.7 / 16.3
EER				4.82	4.39	4.40
COP				4.61	4.39	4.70
SEER				8.20	8.00	8.20
SCOP				4.20	4.20	4.20
Pdesign (@-10°C)			kW	7.00	7.00	7.20
Seasonal Energy Label	Cooling / Heating			A++ / A+	A++ / A+	A++ / A+
Annual Energy Consumption	Cooling / Heating			299 / 2,333	346 / 2,333	376 / 2,467
Airflow Rate	Nom		m^3/min	60	60	60
Sound Pressure	Cooling	Nom	dBA	49	50	50
	Heating	Nom	dBA	53	54	54
Sound Power	Cooling	Max	dBA	64	65	66
Dimensions	W x H x D		mm	950 x 834 x 330	950 x 834 x 330	950 x 834 x 330
Net Weight			Kg	61	61	61
Refrigerant	Type			R32	R32	R32
	Charge		Kg	2.3	2.3	2.6
	Additional Charge		g/m	20	20	20
	GWP			675	675	675
	t-CO_2 eq			1.55	1.55	1.76
Operation Range (Outdoor)	Cooling	Min ~ Max	°C DB	-10 ~ 48	-10 ~ 48	-10 ~ 48
	Heating	Min ~ Max	°C WB	-18 ~ 18	-18 ~ 18	-18 ~ 18
Power Supply			Ø / V / Hz	1 / 220-240 / 50	1 / 220-240 / 50	1 / 220-240 / 50
Power Supply Cable			No. x mm^2	3C x 2.5	3C x 2.5	3C x 2.5
Transmission Cable			No. x mm^2	4C x 0.75	4C x 0.75	4C x 0.75
Circuit Breaker			A	25	25	25
Piping Length Total			m	70	70	75
Piping Length per Branch		Max	m	25	25	25
Piping Elevation Difference	IDU - ODU	Max	m	15	15	15
	IDU - IDU	Max	m	7.5	7.5	7.5
Piping Connection	Liquid		mm(inch) x No.	Ø6.35 (1/4) x 4	Ø6.35 (1/4) x 4	Ø6.35 (1/4) x 5
	Gas		mm(inch) x No.	Ø9.52 (3/8) x 4	Ø9.52 (3/8) x 4	Ø9.52 (3/8) x 5

Notes :1. Capacities are based on the following conditions:
Heating: - Indoor Temperature 20°C(68°F) DB/15°C(59°F) WB
- Outdoor Temperature 7°C(44.6°F) DB/6°C(42.8°F) WB
Piping Length: - Interconnecting Piping Length 7.5m
- Level Difference of Zero
2. * : See page "Combination Table".
3. Due to our policy of innovation some specifications may be changed without notification.
4. At least two indoor units should be connected
5. Minimum comnination capacity rate should be more than 40%
6. This product contains fluorinated greenhouse gases (R32)