



INVERTER HEAT PUMP MODEL



SRK-ZSX-W

Wall Mounted type



SRK20ZSX-W, SRK25ZSX-W, SRK35ZSX-W
SRK50ZSX-W, SRK60ZSX-W

Pure White(-W)



SRK-ZSX series can be selected for use both R32 and R410A outdoor unit.



SRK-ZSX series can be selected for use as indoor units in the combination with SCM Multi system outdoor unit.



Wireless remote control



SRC20ZSX-W, SRC25ZSX-W, SRC35ZSX-W,
SRC50ZSX-W, SRC60ZSX-W



FUNCTIONS

Energy saving



Air flow



Clean operation & Filter



Comfort & Convenience



Others



SPECIFICATIONS

| Indoor unit | | | SRK20ZSX-W,-WB,-WT | SRK25ZSX-W,-WB,-WT | SRK35ZSX-W,-WB,-WT | SRK50ZSX-W,-WB,-WT | SRK60ZSX-W,-WB,-WT |
|-------------------------------------|---------|-------------------------|---|-------------------------|-------------------------|-------------------------|--------------------------|
| Outdoor unit | | | SRC20ZSX-W | SRC25ZSX-W | SRC35ZSX-W | SRC50ZSX-W | SRC60ZSX-W |
| Power source | | | 1Phase, 220 - 240, 50Hz | | | | |
| Nominal cooling capacity (Min~Max) | | kW | 2.0 (0.9~3.4) | 2.5 (0.9~3.8) | 3.5 (0.9~4.5) | 5.0 (1.0~6.2) | 6.1 (1.0~6.9) |
| Nominal heating capacity (Min~Max) | | kW | 2.7 (0.8~5.5) | 3.2 (0.8~6.0) | 4.3 (0.8~6.8) | 6.0 (0.8~8.2) | 6.8 (0.8~8.8) |
| Power consumption | | Cooling/Heating kW | 0.31 / 0.47 | 0.44 / 0.59 | 0.74 / 0.90 | 1.24 / 1.36 | 1.71 / 1.65 |
| EER/COP | | Cooling/Heating | 6.45 / 5.74 | 5.68 / 5.42 | 4.73 / 4.78 | 4.03 / 4.41 | 3.57 / 4.12 |
| Max. running current | | A | 9 | 9 | 9 | 15 | 15 |
| Sound power level | Indoor | Cooling/Heating | 53 / 55 | 55 / 56 | 58 / 58 | 59 / 62 | 62 / 63 |
| | Outdoor | Cooling/Heating | 56 / 58 | 57 / 58 | 61 / 62 | 63 / 61 | 65 / 64 |
| Sound pressure level | Indoor | Cooling (Hi/Me/Lo/Ulo) | 38 / 31 / 24 / 19 | 39 / 33 / 25 / 19 | 43 / 35 / 26 / 19 | 44 / 39 / 31 / 22 | 48 / 41 / 33 / 22 |
| | | Heating (Hi/Me/Lo/Ulo) | 38 / 33 / 25 / 19 | 40 / 34 / 27 / 19 | 42 / 35 / 28 / 19 | 47 / 41 / 33 / 23 | 47 / 42 / 34 / 23 |
| | Outdoor | Cooling/Heating | 43 / 45 | 44 / 45 | 48 / 47 | 51 / 49 | 52 / 53 |
| Air flow | Indoor | Cooling (Hi/Me/Lo/Ulo) | 11.3 / 9.1 / 6.0 / 5.0 | 12.2 / 10.0 / 6.7 / 5.0 | 13.1 / 10.8 / 7.3 / 5.0 | 14.3 / 12.4 / 7.8 / 5.4 | 16.3 / 13.4 / 8.9 / 5.4 |
| | | Heating (Hi/Me/Lo/Ulo) | 12.2 / 10.3 / 7.2 / 5.4 | 12.8 / 11.0 / 7.8 / 5.4 | 13.9 / 11.8 / 8.6 / 5.4 | 17.3 / 14.3 / 9.8 / 6.2 | 17.8 / 13.7 / 10.9 / 6.2 |
| | Outdoor | Cooling/Heating | 31.0 / 31.0 | 31.0 / 31.0 | 36.0 / 31.0 | 39.0 / 33.0 | 41.5 / 39.0 |
| Exterior dimensions | Indoor | HeightxWidthxDepth | 305 x 920 x 220 | | | | |
| | Outdoor | HeightxWidthxDepth | 640 x 800(+71) x 290 | | | | |
| Net weight | | Indoor / Outdoor | 13.0 / 43.0 | | 13.0 / 45.0 | | |
| Refrigerant | | Type/GWP | R32 / 675 | | | | |
| | | Charge | 1.20 / 0.810 | | | 1.30 / 0.878 | |
| Refrigerant piping size | | Liquid/Gas | 6.35(1/4") / 9.52(3/8") | | | 6.35(1/4") / 12.7(1/2") | |
| Refrigerant line (one way) | | length | Max.25 | | | | |
| Vertical height differences | | Outdoor is higher/lower | Max.15 / Max.15 | | | Max.20 / Max.20 | |
| Outdoor operating temperature range | | Cooling | -15~46 | | | | |
| | | Heating | -20~24 | | | | |
| Clean filter | | | Allergen Clear Filter x 1, Photocatalytic Washable Deodorizing Filter x 1 | | | | |

* The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB.


Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

* 'tonne(s) of CO₂ equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.

Mitsubishi Heavy Industries latest technology offers high seasonal efficiency

The new ZSX series meets outstanding energy efficiency receiving Europe's highest seasonal energy rating (A+++).

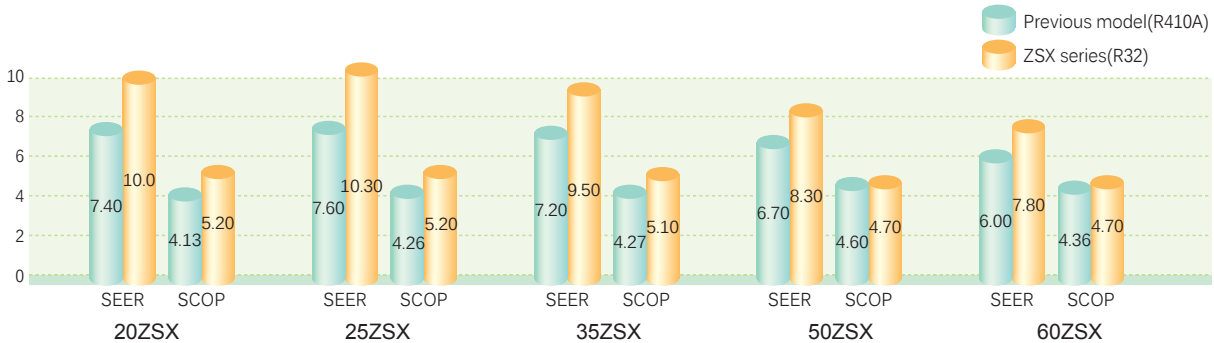


- SEER and SCOP is defined in European regulations. Please refer to P78

Low Global Warming Potential (GWP) and High energy efficiency by new refrigerant R32

The benefits of R32 GAS

- R32 has a GWP of 675, 68% less than R410A gas with GWP 2088.
- It requires 20% less charge compared to R410A gas.
- It provides 3% to 5% more energy efficiency compared to R410A gas.
- It complies F-gas phasedown.

less than $\frac{1}{3}$

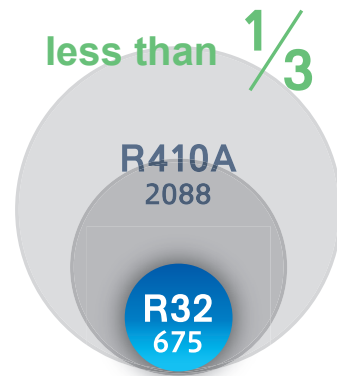

Colour variation available

User can choose the model from three different colors allowing more choice depending on the style of the room.



Black & White(-WB)



Titanium(-WT)

